

Aqua Oxygen Optode



The Aqua Oxygen Optode 4531 is a compact fully integrated sensor for measuring O₂ concentration and temperature.

Advantages


- Optical
- Best in test
- Long time stability
- Stable and rugged foil. No foil change necessary
- Low maintenance needs
- Not stirring sensitive (it consumes no oxygen)
- Presenting calibrated data directly
- Stand-alone sensor
- Output format: 4-20mA/0-5V and RS-232
- Customized cable lengths

Since oxygen is involved in most of the biological and chemical processes in aquatic environments and in the process industry, it is one of the most important parameters to be measured. Aanderaa revolutionized oceanographic oxygen monitoring/research with the introduction of oxygen optodes in 2002. Land-based aquaculture applications include closed, semi-closed and open cages, keeping control of oxygen levels 24/7 in both RAS and flow-through systems for environmental monitoring.

AANDERAA

a xylem brand

Specifications AQUA OXYGEN OPTODE 4531

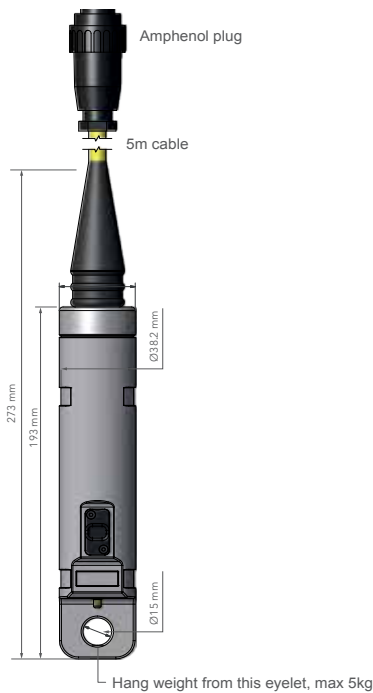

Available cables	Cable
Cable from sensor to Amphenol plug	5440
8-pin male Subconn plug directly on sensor	5441
Cable from sensor to free end	5442
Cable from sensor to 8-pin male Subconn plug	5443
Cable from sensor to 9-pin Dsub, RS-232	5972



Foil Service Kit 5551. FDO701

Misleading specifications

When Aanderaa states an absolute accuracy of e.g. ($\pm 5\%$ or $\pm 8 \mu\text{M}$) we mean the accuracy of the sensor in the field over the entire range of oxygen concentrations and temperatures, others might refer to accuracy in the laboratory just after the sensor was calibrated. When Aanderaa give response time in water others refer to response time in air which is much faster. For more information read our [Best Practice document](#) on Oxygen Optodes.

Technical Details		
Oxygen: Sensing Foils: Operation Range: Calibration Method:	O₂ Concentration Stable and rugged FDO701, foil 0 - 1000 μM or 0-32 mg/L 40-point automatic calibration, 20-point verification, 3 fully Winkler calibrated optodes for referencing	Air Saturation 0 - 300%
Calibration Range: Resolution: Accuracy: Response Time (63%): Typical field drift: Foil Lifetime:	0 - 500 μM or 0-16 mg/L <0.1 μM or 0.0032 mg/L <8 μM^2 or 0.256 mg/L <30 sec <0.5% per year +10 years, do not change foil unless mechanically damaged.	0 - 120% 0.05% <5%
Temperature: Range: Resolution: Accuracy: Response Time (63%): Typical field drift:	-5 to +40°C (23-104°F) 0.01°C (0.054°F) $\pm 0.03^\circ\text{C}$ (0.054°F) 2 sec < 0.03 degC per year	
Output format:	4531A: 0 - 5V, RS-232 4531C: 4 - 20mA, RS-232 4531D: RS-232	
Output Parameters: RS-232 Analog channel 1: Analog channel 2:	O ₂ Concentration in μM and mg/L, Air Saturation in %, Temperature in °C, Oxygen raw data and Temperature raw data O ₂ Concentration in μM , or Air Saturation in % Temperature in °C, O ₂ Concentration in mg/L	
Sampling interval:	1 sec - 255 min	
Supply voltage: RS-232: Analog:	5 to 30Vdc 7 to 30Vdc, 12 to 30Vdc for 0-10V	
Current drain: RS-232 Average: Maximum: Quiescent: Analog:	0.16 + 48mA/S where S is sampling interval in seconds 100mA 0.16mA 20mA + RS-232 drain	
Operating depth:	0-100 meters (0 - 328ft)	
Electrical connection:	Amphenol 16C or Subconn 8M	
Dimension (WxDxH):	Ø38.2 x 193/273mm/ (Ø1.50 x 7.60/10.75in)	
Weight: Sensor: 5 m cable:	160g (5.6oz) 500g (17.6oz)	
Materials:	Titanium, PA	
Cable: Outer diameter: Min. bending radius:	9.9 +/- 0.4mm (0.39 +/- 0.016in) 155mm (6.10in)	
Accessories:	Foil Service Kit 5551	

⁽¹⁾ O₂ concentration in μM = $\mu\text{mol/l}$. To obtain mg/l, divide by 31.25

⁽²⁾ Requires salinity compensation for salinity variations > 1mS/cm

⁽³⁾ Within calibrated range 0 - 120% / 0 - 30°C

⁽⁴⁾ Within calibrated range 0 - 36°C

Specifications subject to change without prior notice.

Aanderaa Data Instruments AS

Sanddalsringen 5b
P.O. Box 103 Midtun
5843 Bergen, Norway

+47 55 60 48 00
aanderaa.info@xylem.com
Aanderaa.com



Aanderaa.com/URL