


MOTUS Wave Height Sensor 6729

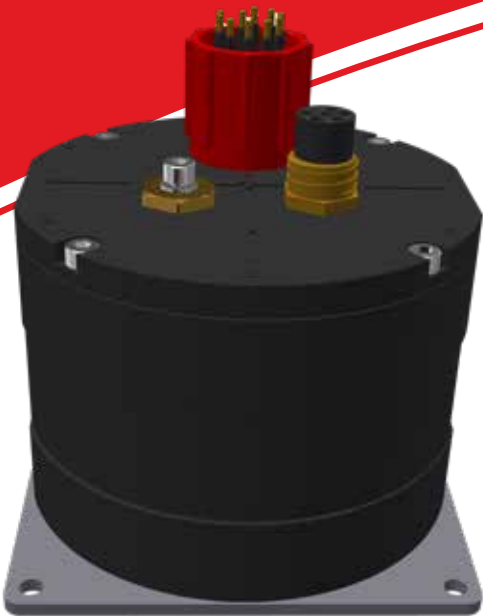

The MOTUS Wave Height Sensor is an accurate wave height sensor that processes wave data and configures to present parameters and non-directional wave spectrum directly. The sensor can be connected to an Aanderaa SmartGuard using the CAN Bus based AiCaP protocol, or it can be connected to most third-party dataloggers through the RS-232 interface.

Key features:


- Configurable transfer function to compensate for buoy response.
- Compensation algorithm for installation outside of buoy center.
- Built-in solid state 9-axis accelerometer/gyroscope/magnetometer.
- A compact field friendly low power multi-parameter wave sensor.
- Wide range of parameters are calculated inside the sensor, configurable output.
- Direct readout of engineering data.
- Customer configurable separation frequency between wind and swell waves.
- Extremely rugged and watertight. Handles 30 meter knockdown.
- Options to upgrade sensor to wave direction parameters.

Applications:


Oceanographic research, Ports & Harbours, Offshore / Oil & Gas, Aquaculture / fisheries, Environmental management, Infrastructure design / Survey companies, Offshore wind.

Specifications MOTUS WAVE HEIGHT SENSOR

SPECIFICATIONS XAD428-R2-NOR

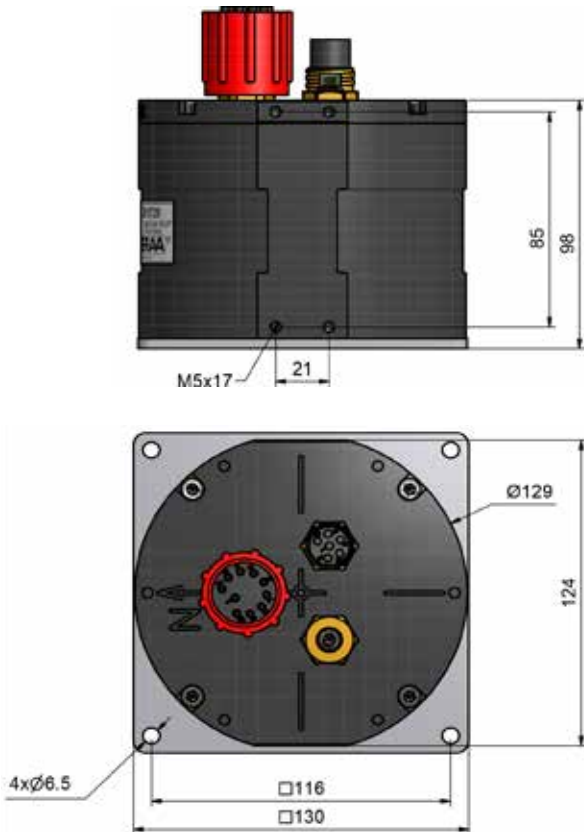


PIN CONFIGURATION WET-CON MCBH6F EXTERNAL COMPASS INPUT*

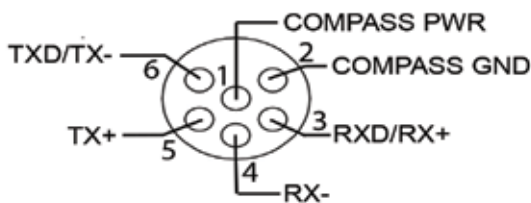

FEMALE FACE VIEW

PIN CONFIGURATION WET-CON MCBH10M AiCaP / RS-232

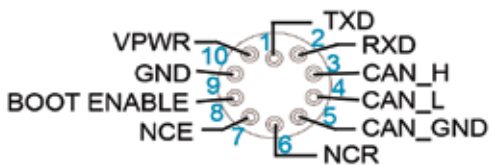

MALE FACE VIEW

* Only in use with Wave license enabled

Technical Details

Wave Height:	
Range:	30m
Resolution:	< 0.001m
Accuracy:	< ±0.05m or 1% of reading ¹⁾
Wave Period:	
Range:	1.42 - 33s
Resolution:	< 0.05s
Accuracy:	< 1% ¹⁾
Integration Time:	5 - 60 minutes
Wave Calculation Update Rate:	2 minutes
Sampling Frequency:	
IMU output rate:	100Hz
Interfaces:	AiCaP, RS-232
Power:	
Supply voltage:	6-30 Vdc
Current drain:	125mW @ 12V
Environmental:	
Depth rating:	30m
Operating Temperature:	-40 to +70°C
Dimensions:	130x130x110mm
Weight including bracket:	1.23kg
Materials:	POM, Stainless steel 316, Brass
Frequency Based Parameters:	
Significant Wave Height:	H _{mo}
Wave Height Swell/Wind:	H _{mo}
Peak Wave Period:	T _p
Mean Wave Period:	T _{m02}
Long Crestedness Parameter:	T
Wave Energy Spectrum:	E(f)
Time Based Parameters:	
Significant Wave Height:	H _{1/3} , H _{1/10}
Mean Wave Period:	T _z , T _{1/3} , T _{1/10}
Maximum Wave Height:	H _{max}
Wave Period:	T _{max}
Wave Height Max Crest:	C _{max}
Wave Height Max Trough:	T _{rmax}
Heave Timeseries (vertical):	H(t)

⁽¹⁾ Accuracy achieved under temperature from -5 to +40°C

⁽²⁾ Rms 5-60 min.

The above specifications are for the stand-alone sensor only, not the installation it is utilized with.

Specifications subject to change without prior notice.

Aanderaa Data Instruments AS

Sanddalsringen 5b

P.O. Box 103 Midtun

5843 Bergen, Norway

+47 55 60 48 00

aanderaa.info@xylem.com

Aanderaa.com

