



Oxygen Optode 4831/4831F

is a compact fully integrated sensor for measuring the O_2 concentration and temperature.

Fast Response Foil (4831F, refer overleaf)

Advantages:

- Optical lifetime-based luminescence quenching measurement principle
- Multipoint calibrated in 40 points
- Long time stability with pre-burned foil and red reference LED
- Low maintenance needs
- Not stirring sensitive (it consumes no oxygen)
- User friendly
- Small size and weight
- Stand-alone sensor
- Output format: RS232, 0-5V
- Four depth ranges maximum 12000 meter


Since oxygen is involved in most of the biological and chemical processes in aquatic environments, it is a crucial parameter to measure. Oxygen can also be used as a tracer in oceanographic studies. Aanderaa revolutionized oceanographic oxygen monitoring/research with the introduction of oxygen optodes in 2002. Applications range from shallow creeks to the deepest trenches, from tropical to in-ice/in-sediment measurements. More than 150 scientific papers have so far been published using these optodes.

These sensors are based on the ability of selected substances to act as dynamic fluorescence quenchers. The fluorescent indicator is a special platinumporphyrin complex embedded in a gas permeable foil that is exposed to the surrounding water. This sensing foil is attached to a sapphire window providing optical access to the measuring system from inside a watertight housing. The sensing foil is excited by modulated blue light; the sensor measures the


phase of the returned red light. For improved stability the optode also performs a reference phase reading by use of a red LED that do not produce fluorescence in the foil. The sensor has an incorporated temperature thermistor which enables linearization and temperature compensation of the phase measurements to provide the absolute O_2 -concentration. The lifetime-based luminescence quenching principle offers the following advantages over electro-chemical sensors:

- Less affected by fouling
- Measures absolute oxygen concentration without repeated calibrations
- Excellent long-term stability
- Less affected by pressure
- Pressure behaviour is predictable
- Faster response time

The oxygen optode outputs data in RS-232 and analog 0-5V. The sensor can present the O_2 concentration in μM , Air Saturation in % and Temperature in $^{\circ}C$.

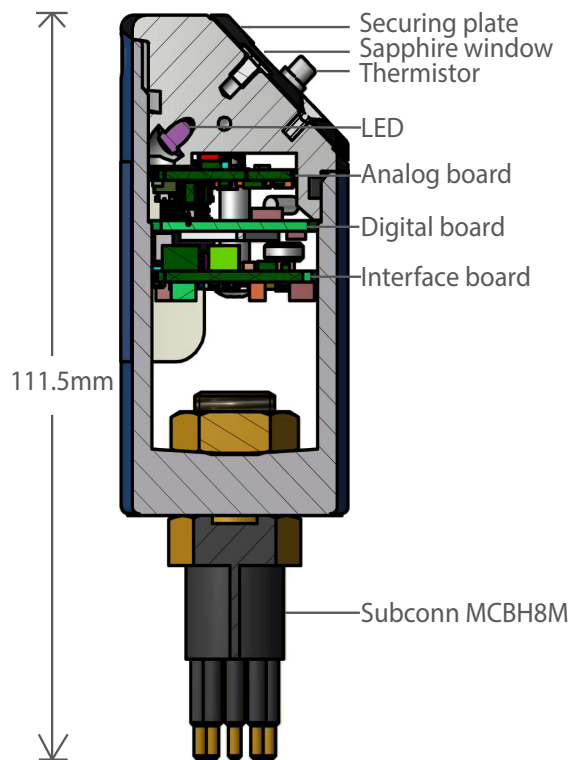


PIN CONFIGURATION SUBCONN MCBH8

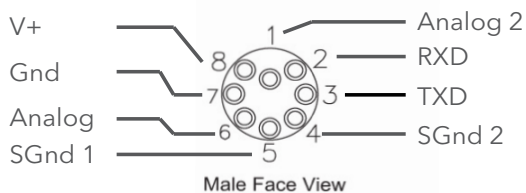

Sensing Foil Considerations

The standard sensing foil is protected by an optical isolation layer which makes the foil extra rugged and insensitive to direct sunlight. The fast response sensing foil is not equipped with this layer; ambient light intensity higher than 15000 lux may cause erroneous readings. To avoid potential bleaching the fast response foil should be protected from ambient light when storing the sensor. We recommend the standard foil in applications where fast response time is not needed.

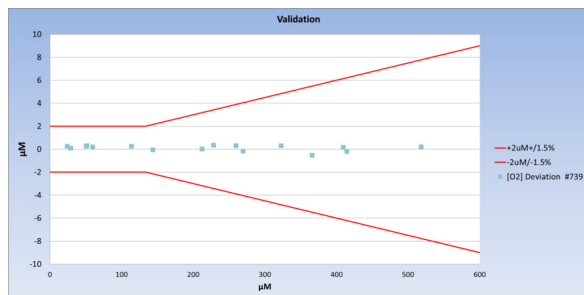

Typical validation at 20 points after calibration



Visit our Web site for the latest version of this document and more information www.aanderaa.com

Aanderaa is a trademark of Xylem Inc. or one of its subsidiaries. © 2018 Xylem, Inc. D403 September 2018

Oxygen:	O₂-Concentration	Air Saturation
Measurement Range:	0 - 1000 µM ¹⁾	0 - 300%
Calibration method:	40-point automatic calibration, 20-point verification, 3 fully Winkler calibrated optodes for referencing	
Foils:	Pre-burned PreSens Pst3 foils	
Calibration Range²⁾:	0 - 500 µM	0 - 150%
Resolution:	< 0.1 µM	0.05 % ⁴⁾
Accuracy:	< 2 µM or 1.5% ³⁾	< 1.5 % ⁴⁾
Response Time (63%):	4330F (with fast response foil) <8 sec	4330 (with standard foil) <25 sec
Typical field drift:	<0.5 % per year	
Temperature:		
Range:	-5 to +40°C (23 - 104°F)	
Resolution:	0.01°C (0.018°F)	
Accuracy:	±0.03°C (0.18°F) ⁵⁾	
Response Time (63%):	<2 sec	
Output format:	RS-232, 0-5V	
Output Parameters:		
RS-232:	O ₂ Concentration in µM, Air Saturation in %, Temperature in °C, Oxygen raw data and Temperature raw data	
Analog channel 1:	O ₂ Concentration in µM, or Air Saturation in %,	
Analog channel 2:	Temperature in °C	
Sampling interval:	2 sec - 255 min	
Supply voltage:	5 to 14Vdc	
Current drain:		
Average:	0.16 + 48 mA/S where S is sampling interval in seconds	
Maximum:	100mA	
Quiescent:	0.16 mA	
Operating depth:	SW: 0 - 300m (0 - 984ft) IW: 0 - 3000m (0 - 9,845ft) DW: 0 - 6000m (0 - 19,690ft) Hadal ⁶⁾ : 0-12000m (0-39,380ft)	
Elec. connection:	8 pin Subconn MCBH8M	
Dimensions (WxDxH):	Ø36 x 111.5mm (Ø1.4"x 4.4")	
Weight:	217g (7.65oz)	
Materials:	Epoxy coated Titanium, PA	
Accessories:	Foil Service Kit 4733/4733O (standard)/ 4794(fast)	

¹⁾ O₂ concentration in µM = µmol/l. To obtain mg/l, divide by 31.25

²⁾ other ranges available on request.

³⁾ requires salinity compensation for salinity variations > 1mS/cm, and pressure compensation for pressure > 100meter

⁴⁾ within calibrated range 0 - 120% / 0 - 30°C

⁵⁾ within calibrated range 0 - 30°C

⁶⁾ product number 5331

Specifications subject to change without prior notice.

Misleading specifications

When Aanderaa states an absolute accuracy of e.g (±1.5% or ±2 µM) we mean the accuracy of the sensor in the field over the entire range of oxygen concentrations and temperatures, others might refer to accuracy in the laboratory just after the sensor was calibrated. When Aanderaa give response time in water others refer to response time in air which is much faster. For more information read our Best Practice document on Oxygen Optodes.

Aanderaa Data Instruments AS
Sanddalsringen 5b, Postboks 103 Midtun,
5843 Bergen, Norway
Tel +47 55 60 48 00
Fax +47 55 60 48 01